



Applied Physics
Systems

Model 539


High Speed Digital 3-Axis Fluxgate Magnetometer

Features

- High speed digital 3-axis magnetometer
- Up to 38400 baud transmission rate
- Simplified magnetic data acquisition
- Use in command mode or autosend mode
- -25°C to 70°C operating temperature range

Applications

- High speed magnetic sensing
- Magnetic anomaly detection
- Guidance/Compassing
- Laboratory measurements
- Materials testing

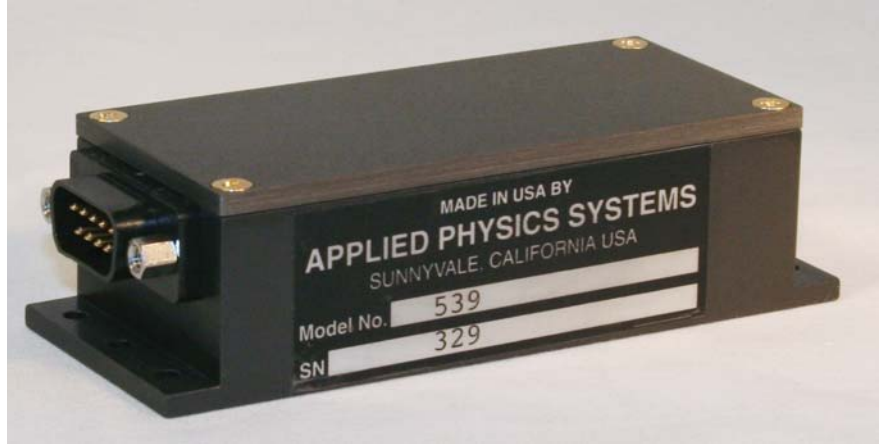

The Model 539 is the first high-speed digital output 3-axis fluxgate magnetometer to be commercially available. The system can convert and transmit over its serial port (at 38400 baud) to all three axes outputs at a rate of 250 samples per second. Slower data rates can also be selected; transmission rate and baud rates are user programmable.

The Model 539 uses three separate 16-bit sigma delta converters to achieve the high throughput. The scale factor is set so that a full scale input of 10^{-4} T (1G) represents 32768 counts on the system Analog-to-Digitals. The least count represents about 3nT. Noise of the system is 1 - 2 counts.

The Model 539 system is ideally suited to situations where high speed magnetic data must be acquired and analyzed. In the past, such systems have normally used a combination of an analog output fluxgate and an Analog to Digital (A to D) board in a PC.

The Model 539 simplifies and reduces the cost of the magnetic data acquisition system by eliminating the cumbersome A to D board.

The Model 539 can be used in either a command mode or autosend mode. In the command mode, the Model 539 responds to commands to transmit data issued by an external computer. In the autosend mode, the Model 539 begins sending data as soon as power is applied to the unit.

The Model 539 can be supplied with an optional connection cable and breakout box which allows easy powering and connection to an external computer. A Windows-compatible configuration, data acquisition, and display program is supplied with the 539. This program enables the user to acquire and graphically display data as well as configure the Model 539 send rate, baud rate, output format, and other features.

In addition to the standard RS232 interface, the Model 539 is also equipped with a TTL interface for communication with a microprocessor.

www.appliedphysics.com

281 East Java Drive, Sunnyvale, CA 94089 USA • 650.965.0500 • Fax: 650.965.0404 • email: service@appliedphysics.com

Model 539

High Speed Digital 3-Axis Fluxgate Magnetometer



Applied Physics
Systems

PHYSICAL


Width	1.6" (40.64 mm)
Height	1.125" (28.575 mm)
Length	4.08" (103.632 mm)
Weight	150 g
Input Connections (wire option)	9-pin nonmagnetic "D" (Female)

ELECTRICAL

Power input	50 ma @ +4.95 to +9 VDC
Analog to Digital	16-bit Sigma Delta
Baud rate (user selectable)	300, 1200, 2400, 4800, 9600, 19200, 38400
Maximum data transfer speed (38.4k baud)	250 3-axis samples/sec

ENVIRONMENTAL

Operating Temperature	-25°C to +70°C
Accuracy	±1 % Full Scale
Noise Level	0.3 nT RMS/Hz ^{1/2} 3 µG RMS/Hz ^{1/2}
Range	±65 µT (±0.65 G), ±100 µT optional
Scale Stability	0.05% Full Scale/°C
Initial Offset	<± 200 nT (±2 mG)
Offset vs. Temperature	<5 nT/°C (<0.05 mG)
Orthogonality of Axes	Better than ± 0.5°
Alignment of Axes with Package	Better than ± 0.5°
Linearity	± 0.1% full scale

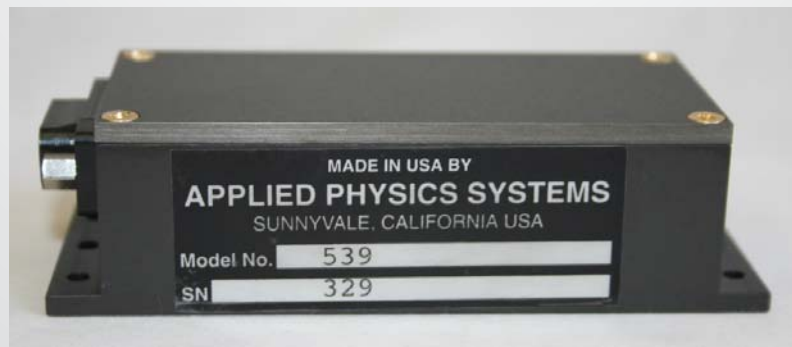

Specifications within this document are subject to change without notice.

250-0539-03-0715

www.appliedphysics.com

281 East Java Drive, Sunnyvale, CA 94089 USA • 650.965.0500 • Fax: 650.965.0404 • email: service@appliedphysics.com