

MODEL 545JH

HEADING SENSOR

FEATURES

- Operates in dynamic environments with 360 degrees continuous control
- 1.100" (28mm) diameter
- 1800 psi pressure rating
- TTL, RS232 digital output

APPLICATIONS

- Towed Sonar Arrays
- Seismic Streamers
- Buoy Orientation
- Magnetic Compassing

The Model 545 series of high performance, fully calibrated, narrow diameter heading sensors are ideally suited for sonar array and seismic streamer applications.

Typical versions (others available)

545C RS422

545TB Titanium housing


545JH RS232

The Model 545 series sensors utilize a solid state "strapdown" configuration that avoids the performance limitations of typical gimbaled systems and offers improved reliability.


A 3-axis fluxgate magnetometer and a 3-axis micro-machined accelerometer are combined with digital signal processing electronics and fully integrated within a small diameter pressure rated housing.

The digital signal processor samples and converts the internal sensor signals to 16-bit digital data and automatically compensates for any temperature and misalignment effects.

Factory calibration of scale factor, bias and misalignment angles is achieved by placing the instrument in high precision fixtures that apply rotation and magnetic fields. Scale factor and bias coefficients are measured over the operating temperature range of the sensor.

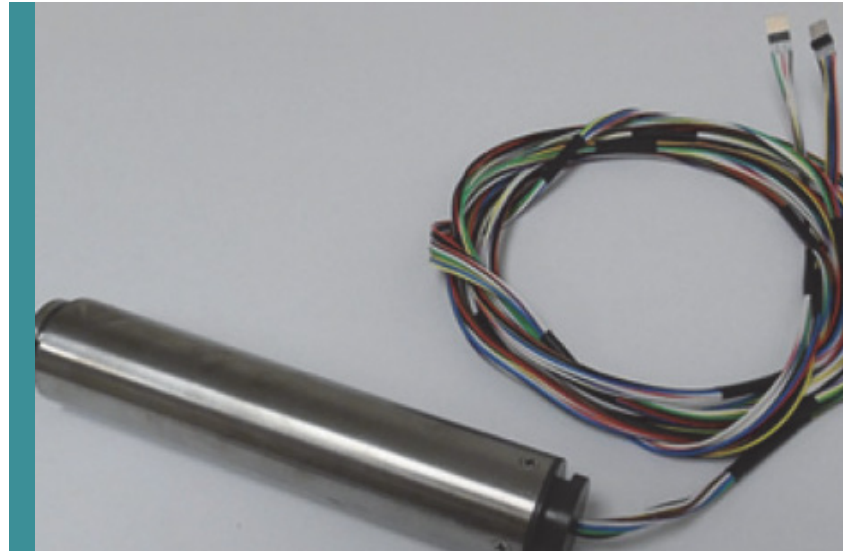

The calculated roll, pitch and azimuth angles are provided on a bi-directional RS232 serial data link and is user programmable for data transfer rates of up to 38400 baud.

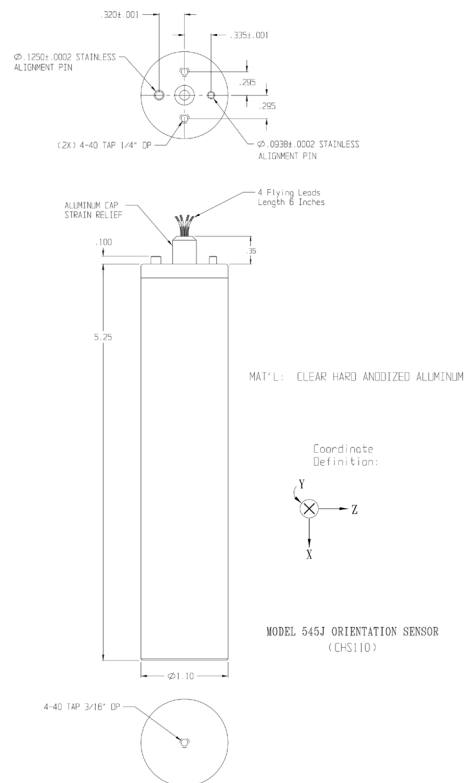

ELECTRICAL

Input Voltage Range	+4.9 V to +12 V
Current Draw	60 mA
Logic Level	RS232
Baud Rate	User Programmable up to 38400 baud
Protocol	User Selectable: ASCII or binary

ENVIRONMENTAL

Operating Temperature Range	0°C to +45°C
Storage Temperature Range	-55°C to +160°C
Shock	1000 G 1 ms half sine wave
Vibration	10 G RMS random 50 Hz to 100 Hz
Operational Pressure Rating	900 psi
Survival Pressure Rating	1800 psi

PERFORMANCE

Azimuth Accuracy	±1.2°
Inclination Accuracy	±0.5°
Roll Accuracy	±0.5°

PHYSICAL

Outside Diameter (OD)	1.100" (28 mm)
Length	5.25" (133 mm)
Weight	4.83 oz (137 g)
Connection	Flying Leads - 8" (20 cm)
Housing Material	Aluminum
Chassis Material	Aluminum

WIRE COLOR**FUNCTION**

RED	+ Voltage In
BLACK	Ground
ORANGE	TTL Serial In
YELLOW	TTL Serial Out

Specifications are subject to change without notice.