

MODEL 539

MAGNETOMETER SENSOR

FEATURES

- High speed digital 3-axis magnetometer
- Up to 38400 baud transmission rate
- Simplified magnetic data acquisition
- Use in command mode or autosend mode
- -25°C to 70°C operating temperature range


APPLICATIONS

- High speed magnetic sensing
- Magnetic anomaly detection
- Guidance/Compassing
- Laboratory measurements
- Materials testing

The Model 539 was the first high-speed digital output 3-axis fluxgate magnetometer to be commercially available. The system can convert and transmit over its serial port (at 38400 baud) to all three axes outputs at a rate of 250 samples per second. Slower data rates can also be selected; transmission rate and baud rates are user programmable.

The Model 539 uses three separate 16-bit sigma delta converters to achieve the high throughput. The scale factor is set so that a full scale input of $\pm 10^{-4}T$ (1G) represents 32768 counts on the system Analog-to-Digitals. The least count represents about 3nT. Noise of the system is 1 - 2 counts.



The Model 539 can be used in either a command mode or autosend mode. In the command mode, the Model 539 responds

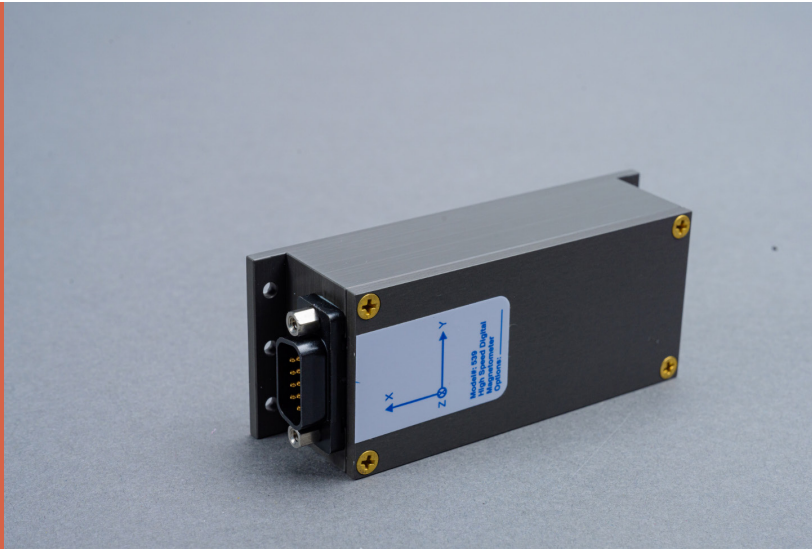

to commands to transmit data issued by an external computer. In the autosend mode, the Model 539 begins sending data as soon as power is applied to the unit.

The Model 539 can be supplied with an optional connection cable and breakout box which allows easy powering and connection to an external computer. A Windows-compatible configuration, data acquisition, and display program is supplied with the 539. This program enables the user to acquire and graphically display data as well as configure the Model 539 send rate, baud rate, output format, and other features.

In addition to the standard RS232 interface, the Model 539 is also equipped with a TTL interface for communication with a microprocessor.

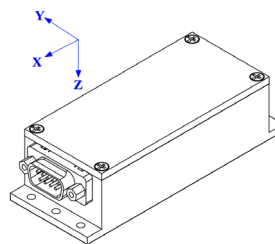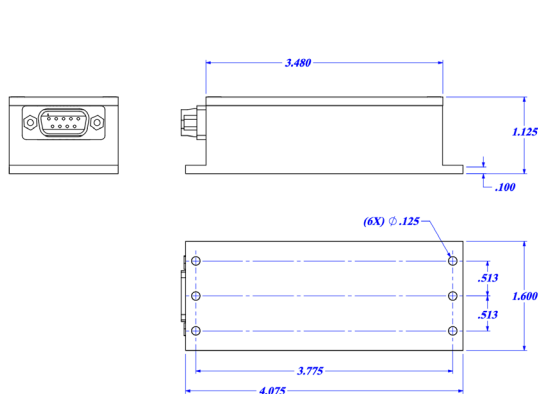

| PIN | FUNCTION |
|-----------|----------------------------|
| 2 | RS232 OUT |
| 3 | RS232 IN |
| 5 | Ground |
| 9 | +Voltage In |
| 1,4,6,7,8 | Reserved- must be floating |

ELECTRICAL

| | |
|--|------------------------------------|
| Input Voltage Range | +4.95 to +9 VDC |
| Current Draw | <80mA at 8VDC |
| Digital Output Protocols | RS232 and TTL |
| Digital Output Formats | ASCII and Binary |
| Baud Rate | User Programmable up to 38400 baud |
| Maximum data transfer speed (38.4k baud) | 200 3-axis samples/sec |
| Analog to Digital | 16-bit Sigma Delta |

ENVIRONMENTAL

| | |
|-----------------------------|-----------------|
| Operating Temperature Range | -25°C to +70°C |
| Storage Temperature Range | -55°C to +160°C |

PERFORMANCE

| | |
|--------------------------------|---|
| Range | $\pm 6.5 \times 10^4$ nT (± 0.65 G) ± 100 μ T (± 1 G) optional |
| Resolution | 2 nT (20 μ G) |
| Accuracy | ± 1 % Full Scale |
| Linearity | ± 0.1 % Full Scale |
| Initial Offset | $< \pm 200$ nT (± 2 mG) |
| Offset vs. Temperature | < 5 nT/°C (< 0.05 mG) |
| Scale Stability | 0.05% Full Scale/°C |
| Noise Level | 0.3 nT (3 μ G) RMS/ $\sqrt{\text{Hz}}$ |
| Frequency Response | DC to 400 Hz (-3 db) |
| Orthogonality of Axes | Better than $\pm 0.5^\circ$ |
| Alignment of Axes with Package | Better than $\pm 0.5^\circ$ |

PHYSICAL

| | |
|------------------|--------------------------------|
| Width | 1.6" (40.64 mm) |
| Height | 1.125" (28.575 mm) |
| Length | 4.08" (103.632 mm) |
| Weight | 150 g |
| Input Connection | 9-pin nonmagnetic "D" (Female) |

Specifications are subject to change without notice.